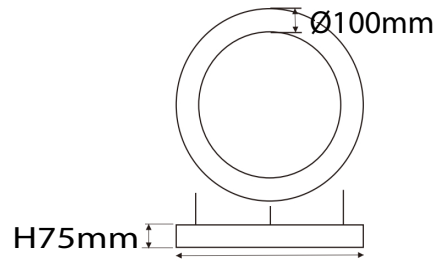


PRO

LUCE

Product Datasheet**LENA 100 Ring****Product description**

Length Customizable

The Ring Profile Light is a modern architectural lighting solution designed to deliver uniform, glare-free illumination with a sleek circular form. Crafted with a high-quality aluminum profile and precision-engineered LED technology, it provides exceptional light distribution while maintaining a minimal and elegant aesthetic.


Its seamless circular design creates a striking visual statement, making it ideal for commercial spaces, offices, reception areas, retail showrooms, hospitality environments, and contemporary residential interiors. The advanced diffuser ensures soft, evenly distributed light with no visible LED dots, enhancing both comfort and ambiance.

PRODUCT PARAMETER

Model	LENA 100 Ring
Beam Angle	120°
Life	50000Hrs.
Installation method	ceiling type / hanging wire type
Waterproof Rating	IP20 , IP40 on request
Profile Size	Ø100mm×75mm
Size	Customizable
Input Voltage	AC220-240V/AC85-265V , 50-60Hz
Lumens	100Lm/w

TECHNICAL DETAILS

Power	80w/m
Face Mask	sanded white/ Black /Silver / RAL and pantone on request
Material	Aluminium + Polycarbonate diffuser / PMMA PRISMATIC on request
Color temperture	2700K/3000K/4000K/6000K/RGBW
Power Supply	ON/OFF power supply/ Dali/ 0-10V / Power supply Customized upon request

PHOTOMETRIC

H(m)	D(cm)	E _{max} (lux)
1.5	245	661.6
2.25	368	294
3.5	572	121.5
4.0	654	93
5.0	818	59.5

